


CJX2 Series AC Contactor

3、 Coil parameters


Model				CJX2-09	CJX2-12	CJX2-18	CJX2-25	CJX2-32	CJX2-40	CJX2-50	CJX2-65	CJX2-80	CJX2-95
pull-in voltage 50/60Hz (A)				(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us	(0.85~1.1) Us
release voltage 50/60Hz (A)				(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us	(0.2~0.75) Us
coil power	50Hz	close	(VA)	70	70	110	110	110	200	200	200	200	200
		hold	(VA)	8	8	11	11	11	20	20	20	20	20
	60Hz	close	(VA)	80	80	115	115	115	200	200	200	200	200
		hold	(VA)	8	8	11	11	11	20	20	20	20	20
		power dissipatio	(W)	1.8-2.7	1.8-2.7	3-4	3-4	3-4	6-10	6-10	6-10	6-10	6-10

2、Appearance and installation dimensions

1、Appearance and installation dimensions

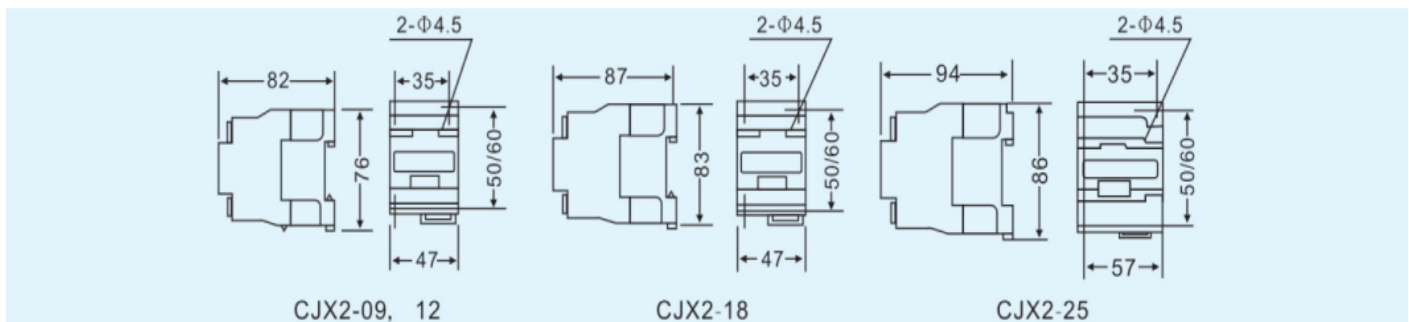

2、Appearance and installation dimensions

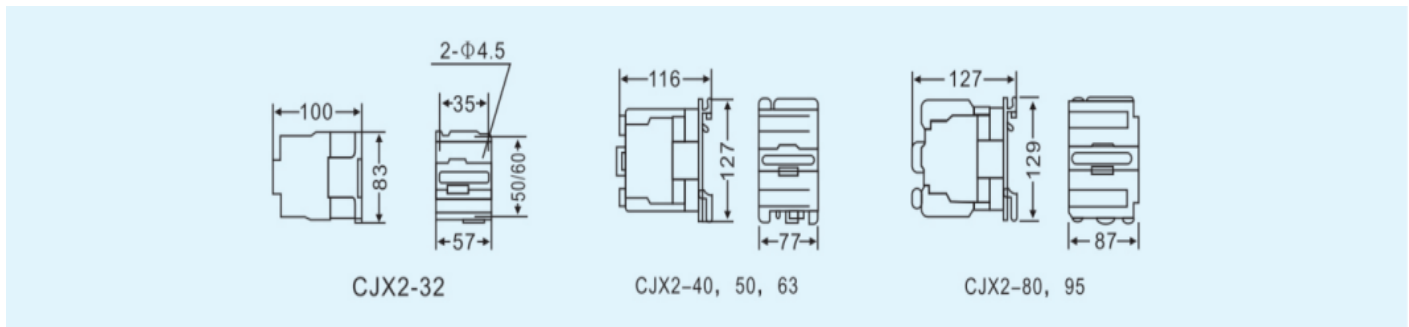

3、CJX2-40~95 Installation dimensions

