



JM1L Series MCCB ELCB

The appearance and installation dimensions of the wiring behind the circuit breaker board

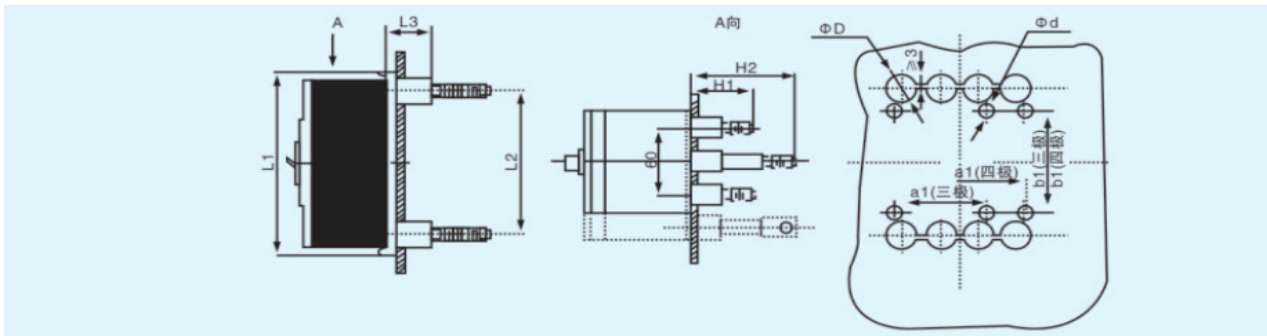

Model	External dimensions					Installation dimensions (mm)					
	L1	L2	L3	H1	H2	a1		b1		ΦD	Φd
						3P	4P	3P	4P		
JM1L-100	164	132	35	53	93	72	102	90	132	22	5.5
JM1L-225	173	144	35	55	100	87	122	93	144	24	5.5
JM1L-400	267	144	37	70	120	87	122	93	225	26	6.5
JM1L-630、800	295	210	37	75	125	87	122	93	243	48	7.0


Appearance and installation dimensions of wiring after inserting the board

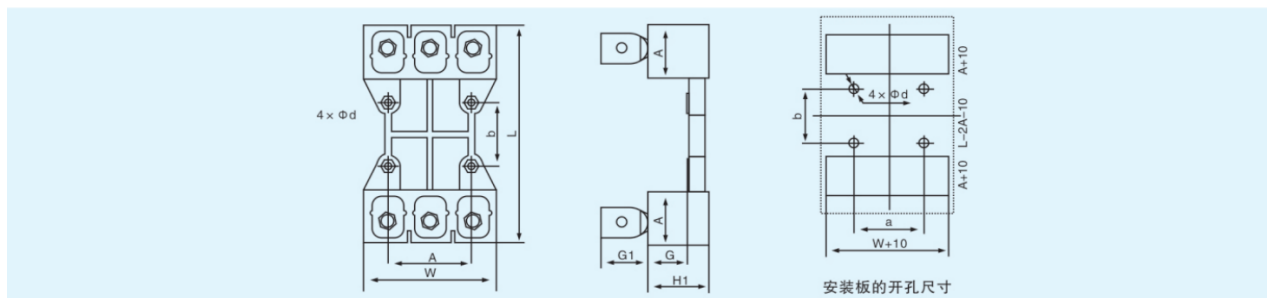

Unit in mm

Model	W		L	A	H1	G	G1	a		b	Φd
	3P	4P						3P	4P		
JM1L-100	94	125	170	38	50	33	38	60	90	56	6.5
JM1L-225	110	145	188	48	50	33	40	70	105	54	7
JM1L-400	144	188	280	50	60	37	48	88	132	143	9
JM1L-630、800	212	282	298	57	100	43	129	140	210	143	9

6. Rotating handle operation module

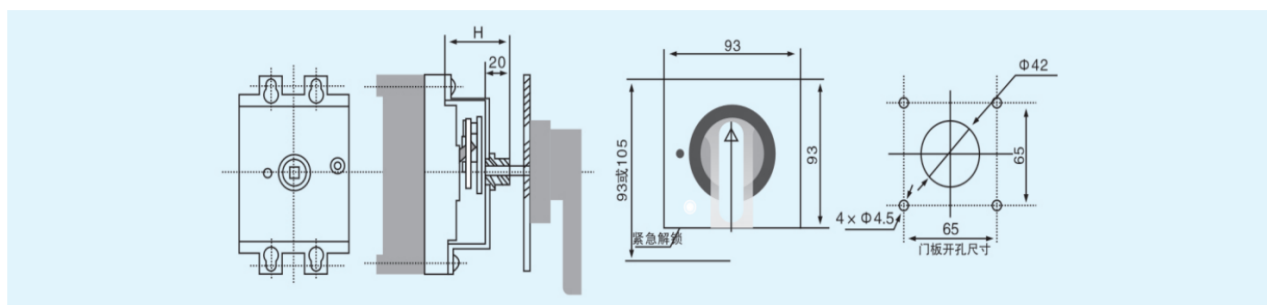

7. Installation dimensions of the rotating handle

Model	JM1L-100	JM1L-225	JM1L-400	JM1L-800
Installation dimensions(H)	49	55	74	66